


ELECTRODYNAMIC EXCITER

PERFORMANCE

Sine Force	4.5 (20)
Natural Air Cooling Random Force	3 (13.3)
Natural Air Cooling Shock Force	9 (40)
Max. Displacement	0.2 (5)
Continuous pk-pk Between Stops	0.35 (9)
Frequency Range ^{1,2}	DC - 11
Acceleration	22
Bare Table	4
1 lb load	2.1
2 lb load	

PHYSICAL

Armature Weight	0.07 (0.032)
Suspension Stiffness	15 (2.63)
Dimensions	5.3 x 6.75 x 3.5 (135 x 171 x 89)
Shaker Weight	6 (2.722)

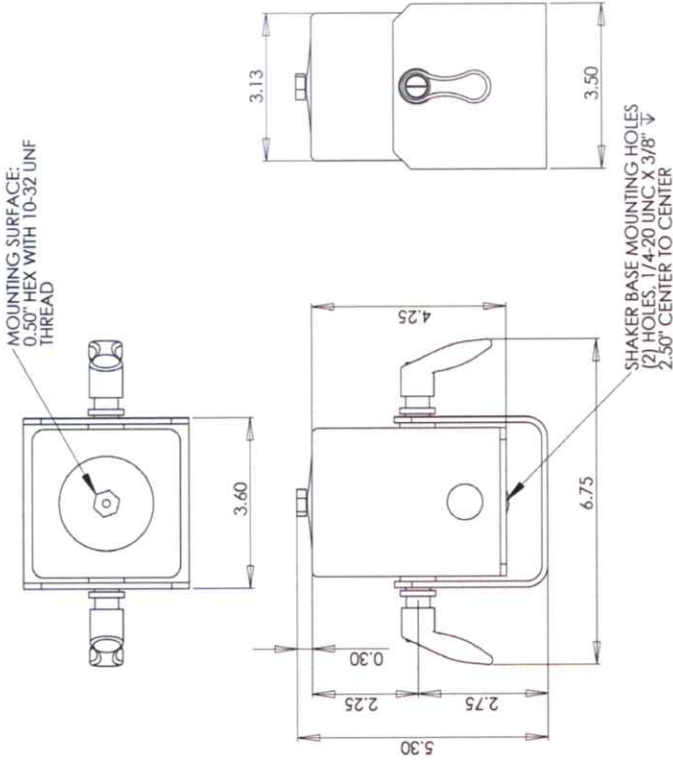

NOTES:

- 1 Load dependent
- 2 Please see systems ratings for additional specs.


SUPPLIED ACCESSORIES:

- Qty 1 - 2110G06 Slinger kit
- Qty 2 - Easy-turn handles

All specifications are at room temperature unless otherwise specified.

ICP® is a registered trademark of PCB Piezotronics, Inc.

In the interest of constant product improvement, specifications may change without notice.



**3149 East Kemper Road
Cincinnati, OH 45241**

**800-860-4867 Fax (513) 458-52172
513-351-9919**

sales@modalshop.com
SAM-F020 revNR 04/04/03

Project Engineer: ATG	Product Manager: MAP	Mkt Team Leader: DWD	Spec Number: PS-0056
Date: 3/31/09	Date: 4/8/09	Date: 3/25/09	