

ES-30-370

System Performance	Metric	American
Rated Sine Force	30 kN	6600 lbf
Rated Random Force	30 kN	6600 lbf
Rated Shock Force	60/90* kN	13200/19800* lbf
Usable Frequency	DC-2800 Hz	DC-2800 Hz
Maximum Velocity	2 /2.5*m/s	78.7/98.4 in/s
Maximum Acceleration	1000 m/s ²	100 g
Maximum Static Payload	500 kg	1100 lbs
Resonance Frequency	2400±5% Hz	2400±5% Hz
Maximum Displacement p-p	51 mm	2 in

Shaker: ET-30-370

Mass of Moving Elements	30 kg	66 lbs
Armature Diameter	370 mm	14.6 in
Weight	2490 kg	6482 lbs
Body Suspension Natural Frequency	<2.5 Hz	<2.5 Hz
Stray Flux Density	<10 Gauss	<10 Gauss
Dimension L×W×H	1328×854×1140 mm	52.3×33.6×45 in

Power Amplifier: SDA-30

Power	30 kVA	30 kVA
Power Supply Requirement	54kVA	54kVA
Dimension L×W×H	620×1010×2106 mm	24.4×39.8×82.9 in
Weight Uncrated	500 kg	2202 lbs


Blower: B-3000

Power	7.5 kW	10.06 hp
Air Flow	0.46 m ³ /s	460 l/s
Air Pressure	8.8 kPa	1.276 psi
Weight Uncrated	180 kg	397 lbs

Options

- Magnesium or Aluminum Armature
- Customized Fixtures (T, L, Cube)
- Combo or Standalone Slip Table
- Pneumatic Isolators or Free Foundation Isolation Base
- Motorized Shaker Body Rotation System
- Air Caster or Glide Rail
- Head Expanders and Vertical Support Platforms
- Enclosed Air Inlet and Outlet Ducts
- Thermal barrier
- Remote control

Outline Drawing

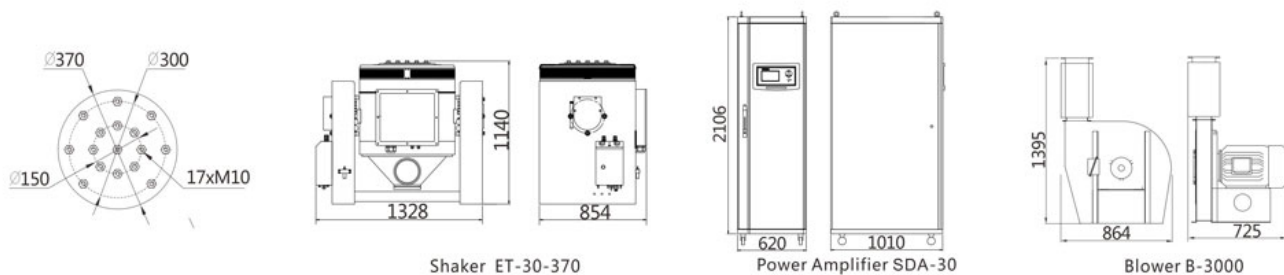

Shaker ET-30-370

Power Amplifier SDA-30

Blower B-3000

NOTE: In keeping with our commitment to continuous product improvement, the information herein is subject to change.

Air-cooled Series

The air-cooled series electro-dynamic vibration test system has the advantages, such as wide frequency range, excellent indicators, high reliability, small floor space, easy to move, and easy to operate.

At present, this series has a variety of models of vibration generators to choose. The exciting force range is from 1kN to 70kN and maximum load is from 70 kg to 1000 kg. Also, the climate and mechanics environmental testing equipments are provided.

Performance characteristics

- Sinusoidal excitation force range: 1kN ~ 70kN
- Random to sinusoidal excitation force ratio 1:1
- Two-times-of-sine shock force (Three times optional)
- Displacement peak-to-peak value of 25mm, 40mm, 51mm, 76mm or 100mm
- Lightweight armature with optimization design and strong vibration-resistant performance, and with better vibration isolation effect of air spring at trunnion position
- Strong bearing capacity of air spring in central room, and good low-frequency performance
- Double magnetic circuit design, with low flux leakage and uniform magnetic field
- Sine, Random and Shock etc. test function
- Good cooling effect and low noise fan